


CE



COATES HEATER CO. INC.
 P.O BOX 1750
 KENT, WA 98035
 Phone (253) 872-7256
 Fax (253) 859-4660

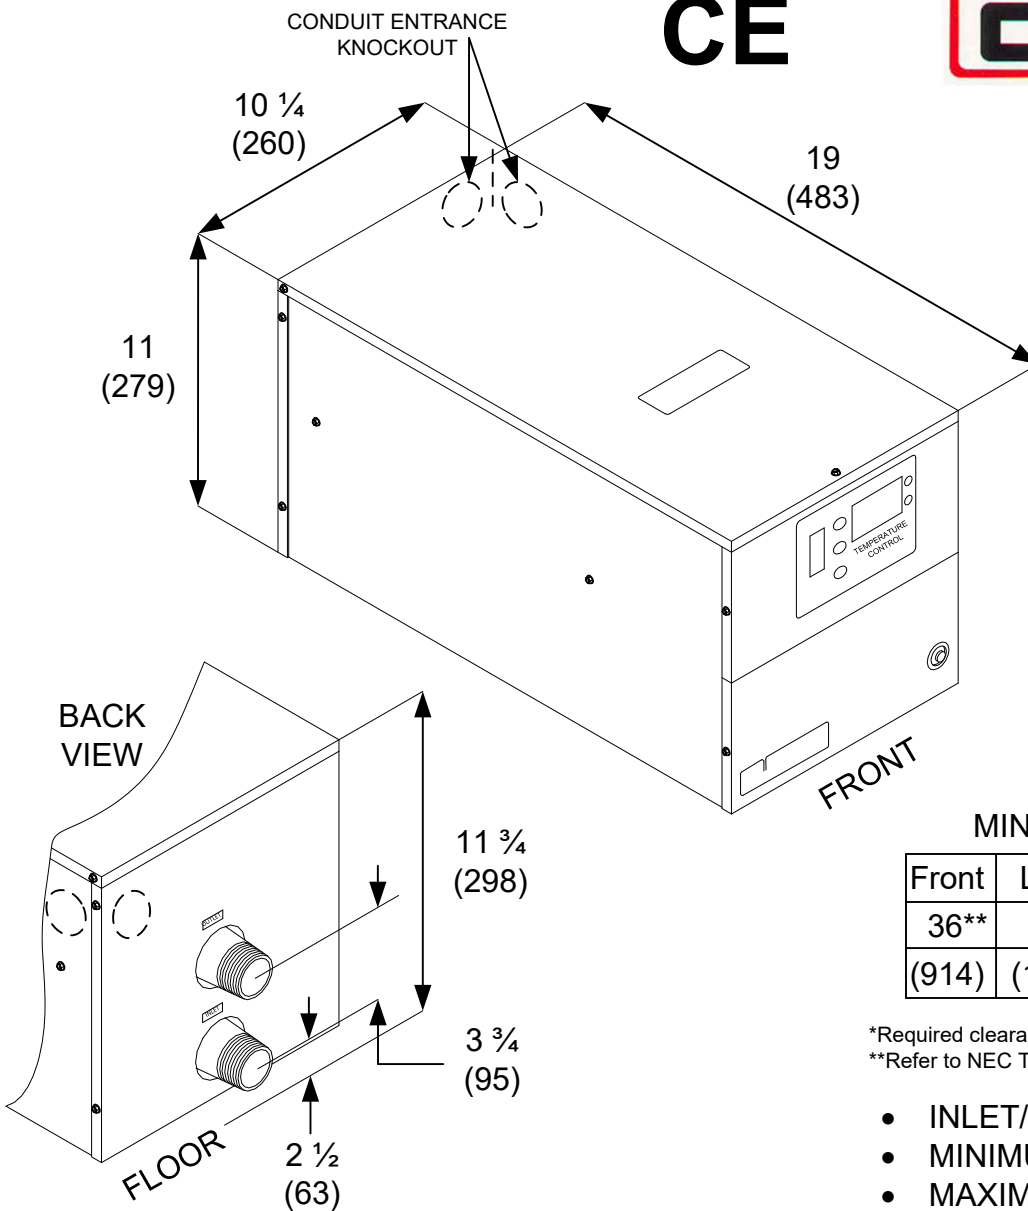

Dimensions: Inches (mm)

MINIMUM CLEARANCES

Front	Left	Right	Top	Back
36**	4	4	20	*Plumbing
(914)	(102)	(102)	(508)	

*Required clearance is based on plumbing configuration used.
 **Refer to NEC Table 110.26 (A)(1)

- INLET/OUTLET 1 1/2 " (38mm) NPT
- MINIMUM FLOW RATE 20 GPM
- MAXIMUM FLOW RATE 80 GPM

MODEL	PHASE	VOLTS	kW	AMPS	BREAKER	WIRE/ 75°C	SHIP WT.
12412CE	1	240	12	50	2 @ 35	#10	46 lbs. (20.9 kg)
12415CE	1	240	15	63	2 @ 50	#8	46 lbs. (20.9 kg)
12418CE	1	240	18	75	2 @ 50	#8	47 lbs. (21.3 kg)
32012CE	3	208	12	34	45	#8	44 lbs. (20 kg)
32015CE	3	208	15	42	60	#6	44 lbs. (20 kg)
32018CE	3	208	18	50	70	#4	46 lbs. (20.9 kg)
32412CE	3	240	12	29	40	#8	44 lbs. (20 kg)
32415CE	3	240	15	37	50	#8	46 lbs. (20.9 kg)
32418CE	3	240	18	44	60	#6	46 lbs. (20.9 kg)
34812CE	3	480	12	15	20	#12	47 lbs. (21.3 kg)
34815CE	3	480	15	19	25	#10	47 lbs. (21.3 kg)
34818CE	3	480	18	22	30	#10	47 lbs. (21.3 kg)
36012CE	3	600	12	12	15	#12	47 lbs. (21.3 kg)
36015CE	3	600	15	15	20	#12	47 lbs. (21.3 kg)
36018CE	3	600	18	18	25	#10	47 lbs. (21.3 kg)