


# CPH



COATES HEATER CO. INC.  
 P.O BOX 1750  
 KENT, WA 98035  
 Phone (253) 872-7256  
 Fax (253) 859-4660

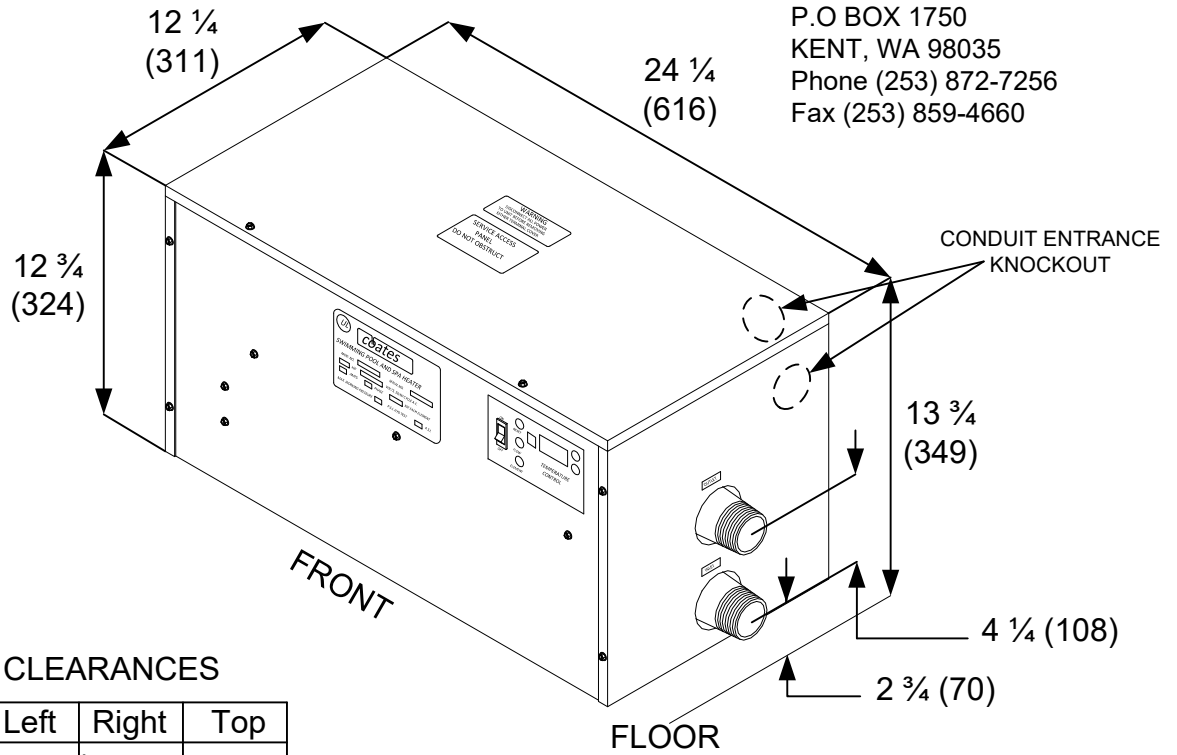

### MINIMUM CLEARANCES

Front	Back	Left	Right	Top
36**	6	18	*Plumbing	18
(914)	(152)	(457)		(457)

Dimensions: Inches (mm)

\*Required clearance is based on plumbing configuration used.

\*\*Refer to NEC Table 110.26 (A)(1)

- INLET/OUTLET 1 1/2 " (38mm) NPT
- MINIMUM FLOW RATE 20 GPM
- MAXIMUM FLOW RATE 80 GPM

MODEL	PHASE	VOLTS	kW	AMPS	BREAKER	WIRE/ 75°C	SHIP WT.
12424CPH	1	240	24	100	3 @ 50	#8	70 lbs. (31.7 kg)
12430CPH	1	240	30	125	3 @ 60	#6	70 lbs. (31.7 kg)
32024CPH	3	208	24	67	90	#3	70 lbs. (31.7 kg)
32030CPH	3	208	30	84	110	#2	70 lbs. (31.7 kg)
32424CPH	3	240	24	58	80	#4	70 lbs. (31.7 kg)
32430CPH	3	240	30	73	100	#3	70 lbs. (31.7 kg)
34824CPH	3	480	24	29	40	#8	67 lbs. (30.4 kg)
34830CPH	3	480	30	37	50	#8	67 lbs. (30.4 kg)
36024CPH	3	600	24	24	30	#10	63 lbs. (28.6 kg)
36030CPH	3	600	30	29	40	#8	63 lbs. (28.6 kg)